


Fiber Optic Patch Panel Pro G2, 19" 1U

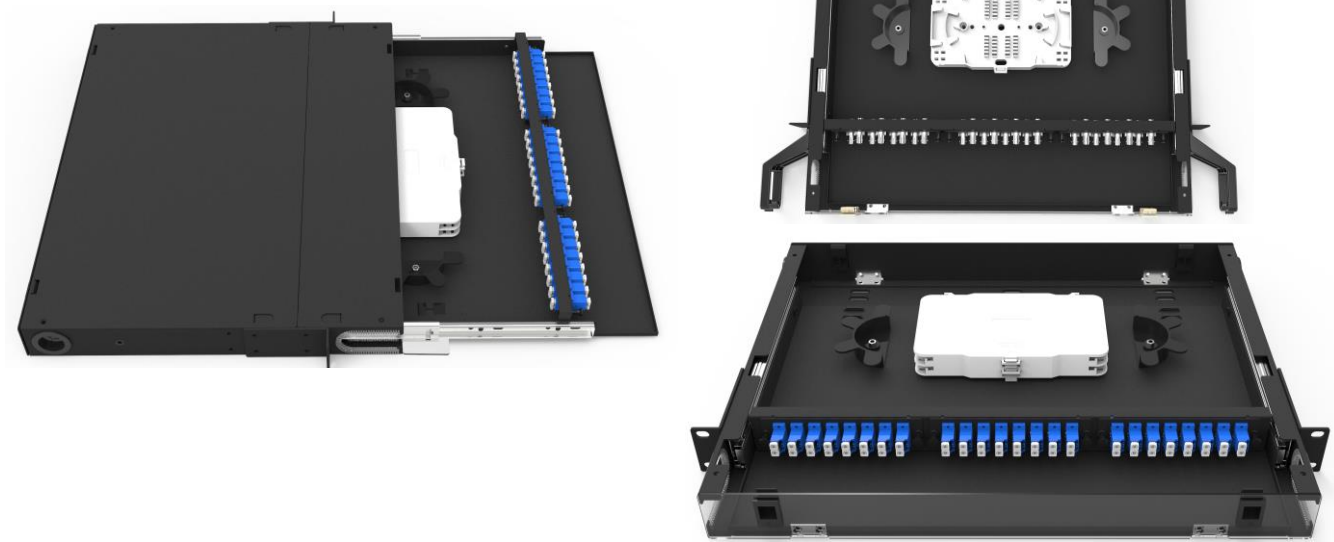

Product Description

PAMix PRO G2 fiber optic patch panel enclosures are manufactured to suite internally splicing of fiber optic cables to fiber pigtails. Its sliding out drawer design optimize fiber splicing and maintenance services for quick splicing speed and internal cable management. Pro G2 enclosures are designed to be installed on rack cabinet's rails, enclosure are shipped with movable mounting brackets. It's usually used to connect active data switches in DC or data switches in multi dwelling buildings.

Wide range of connectors can be used due to its flexible design.

PAMix Pro G2 enclosure manufactured with its two parts upper cover, front and rear removable upper covers. Its side fiber cords entries and smoked transparent hinged front cover make it easy for cable management. Front hinged cover installed with press lock for opening and close.

Pro G2 enclosures are the choice for professional installers where several front fiber patch cords entries in addition to hinged front cover for optimized cable management.

Product Features

- 19", 1U or 2U Enclosures.
- Metal powder coated body.
- Sliding Drawer Type.
- Rack installation.
- Connectors: SC, SCD, LC, LCD, LCQ, LSH, FC, ST.
- Two back rear side cable entries.
- Movable mounting brackets.
- Up to 6 removable snap-in latch front panels with different connector types.
- Front panels accept flanged and flangeless adapters (with screw or without screws).
- Integrated with two side fiber cords cable managers.
- Front transparent hinged cover with two press lock.
- Splice tray and holders are included.

Product Specifications

- Body SPCC; Powder coated.
 - Color Black RAL9005 or Light Grey RAL7035.
 - Installation Rack.
 - Type Single pullout.
 - Front Panels 3 for 1U enclosure, 6 for 2U enclosure
 - Max. Capacity 96 fibers.
 - Cable Entries 2 rear cable entries.
 - Fiber Type Can be used with Single Mode or Multi Mode Fibers
 - Size 1U X W430mm X D327mm.or 2U X W430mm X D327mm
 - Standards TIA/EIA -568-C.8 Compliant, RoHS.
 - Environmental -25°C to 50°C
-

Ordering Information

<u>Product Description</u>	<u>Part Number</u>
- PRO G2 Fiber Patch Panel 1U	1016461
- PRO G2 Fiber Patch Panel 2U	1016462
- PRO G2 Front Plate 3 SCD/LCQ	1016465
- PRO G2 Front Plate 6 SCD/LCQ	1016566
- PRO G2 Front Plate 3 SC/LCD/LSH	1016467
- PRO G2 Front Plate 6 SC/LCD/LSH	1016468
- PRO G2 Front Plate 12 SC/LCD/LSH	1016469
- PRO G2 Front Plate 6 FC/ST	1016470
- PRO G2 Front Plate 12 FC/ST	1016471
- PRO G2 Front Plate Blank	1016475